


# Quickstart Guide

## Wi-Spy Lucid



More on Lucid

1. Screw tri-band, RP-SMA antenna into the appropriate port.
2. Download "Chanalyzer Lite" on PC<sup>1</sup> or Mac for free. Additional features can be unlocked on PC using the paid version of Chanalyzer. Software is available at [metageek.com/downloads/chanalyzer/](http://metageek.com/downloads/chanalyzer/) or at [oscium.com/quickstart](http://oscium.com/quickstart)
3. Insert cable into both the accessory and the host device.<sup>2</sup>
4. When the software is connected to the Wi-Spy Lucid hardware, the icon in the bottom right will show connected.

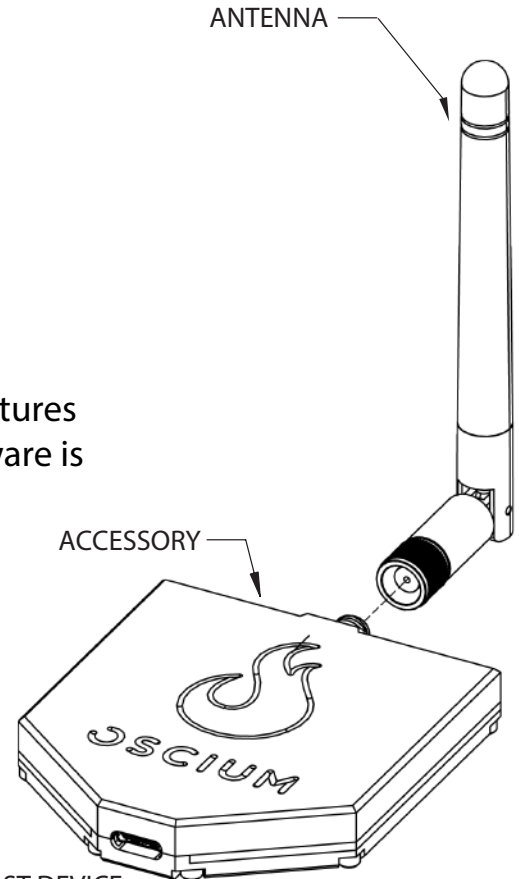

<sup>1</sup> No support for iOS, Android without additional hardware.

<sup>2</sup> Power is supplied from host device.